


DIMENSION

All Dimensions are Approximate. Dimensions May Vary with Bucket. Refer to Operating Specifications.

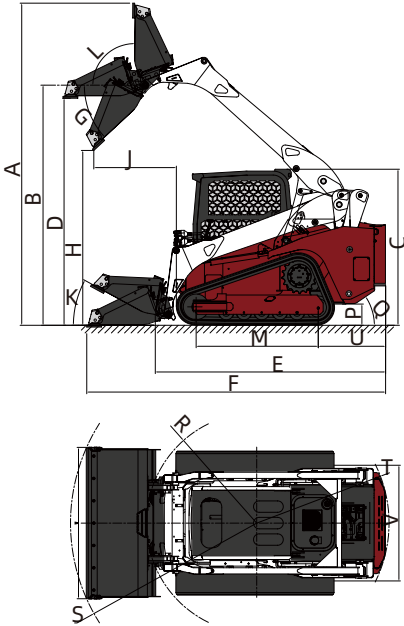

TECHNICAL PARAMETERS

NO.	DESCRIPTION	UNIT	DATA
A	Max.Operation Height	mm	4364
B	Bucket Pin Height	mm	3097
C	Cab Roof Height	mm	2089
D	Max.Height At Bucket Levelled	mm	2945
E	Length Without Attachment	mm	2830
F	Length With Standard Bucket	mm	3939
H	Dumping Height	mm	2301
J	Reach Rollback	mm	1170
M	Wheelbase	mm	1420
P	Ground Clearance	mm	311
R	Front Turning Radius Without Attachment	mm	1538
S	Front Turning Radius	mm	2394
T	Rear Turning Radius	mm	1660
U	Tail Length	mm	860
V	Center Distance between Two Wheels	mm	1360
W	Bucket Width	mm	1920
G	Dumping Angle At Max.Height	°	38
K	Bucket Angle On Ground	°	27
L	Bucket Rollback Angle At Max.Height	°	92.5
Q	Start Angle	°	43

BASIC	Operating Weight (kg)	4500
	Rated Payload (kg)	1100
	Bucket Capacity (m³)	0.56
	Tipping Load (KN)	29
	Breakout Force (KN)	27.6
	Traction Force (KN)	43
	L×W×H (mm)	3939×1920×2089
ENGINE	Engine Model	V3600-T-ETO2
	Rated Power (kW/rpm)	63
	Displacement (L)	3.62
	Fuel consumption (g/kw*h)	225
	Stroke (mm)	98
	Bore (mm)	120
	Emission Standard	Tier II
HYDRAULIC SYSTEM	Hydraulic Flow – Standard (L/min)	72
	Type	Pilot control
	Hydraulic Pressure– Standard (Mpa)	24.5
	Hydraulic Flow – High Flow (L/min)	112
	Loader Hydraulic Pressure (Mpa)	24.5
DRIVE TRAIN	Travel Speed -F&S (km/h)	9.0/13.5
	Rubber Track	400×86SD (E3)
ELECTRIC	Voltage(V)	12
	Capacity(Ah)	165
	Cooling System (L)	6
SERVICE REFILL CAPACITY	Engine Crankcase (L)	11.2
	Fuel Tank (L)	84
	Hydraulic Tank (L)	24

OPTIONAL

Cold Start	Snow Blade
Spiral Drill	Tree Planter
Excavator	Snow Blower
Bevel Sweeper	Four In One Bucket
Closed Sweeper	Reverse Camera
Forks	

Feature

- 1.The whole frame structure provides higher strength and better stability.
- 2.The Kubota engine is powerful, energy-efficient, and provides sufficient power and torque, allowing the skid steer loader to easily handle cooperative work sce.
- 3.It is highly flexible with dual-speed control, allowing the skid steer loader to freely move and operate in tight spaces.
- 4.The low-center-of-gravity design and all-terrain drive ensure excellent stability in various complex work environments, improving safety during operation.
- 5.The driver's cab features a three-dimensional grid safety guardrail with soundproofing and heat insulation, providing a comfortable driving environment and reducing the driver's fatigue.
- 6.High-precision operation and braking are equipped, allowing for precise operation and control, improving work efficiency and accuracy.
- 7.The universal quick-change device is used, allowing for quick and convenient replacement of various attachments. The hydraulic quick-connect head can match with most manufacturers' attachments, such as buckets and forks, to achieve different work applications and multi-functional operation capabilities.
- 8.The design is simple and easy to maintain, providing customers with convenient and simple maintenance and repair methods, reducing downtime and maintenance costs.

Lonking 龙工
Efficiency Rules the Future

CDM311T
Compact Track Loader



- ENGINE MODEL : V3600-T-ETO2
- RATED POWER: 63KW
- OPERATING WEIGHT: 4500kg
- RATED PAYLOAD: 1100kg
- BUCKET CAPACITY: 0.56m³

The following blank can be used for notes or comments

For more information on Lonking products,Please contact our local agent;